


Belzona Rebuilds and Protects Kort Nozzles



View of tug boat in dry dock.

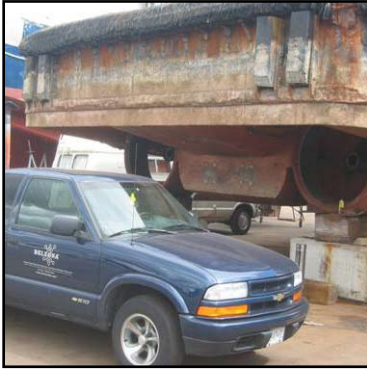

View of one of the blasted nozzles.



Application of first coat of Belzona® 1341 with additional coat to fill voids.



Second coat of Belzona® 1341 applied to complete the application.

STATISTICS

CUSTOMER

Tug boat operator,
Vancouver, BC, Canada

APPLICATION DATE

June 2005

SUBSTRATE

Mild Steel

PRODUCTS

Belzona® 1311
(Ceramic R-Metal)
Belzona® 1341
(Supermetalgilde)

APPLICATION SITUATION

Tug boat kort nozzles.

PROBLEM

Kort nozzles badly eroded.

APPLICATION METHOD

Application was carried out in accordance with Belzona Know-How System Leaflets SOS-1 & -2.

BELZONA FACTS

Customer had given serious consideration to relining nozzles with a stainless steel insert. This, however, posed a clearance problem. The Belzona solution was the quickest, easiest and most economical solution of the two.